

FORM PTO-1390 (REV 10-95)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEYS DOCKET NO. 3607WI-5	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 35 CFR 1.5) 09/831254	
INTERNATIONAL APPLICATION NO. PCT/GB99/04142		INTERNATIONAL FILING DATE 14 December 1999		PRIORITY DATE CLAIMED 15 December 1998	
TITLE OF INVENTION "LOUDSPEAKER"					
APPLICANT(S) FOR DO/EO/US CURTIS, Mervyn Stanley; LONGBOTTOM, Simon Andrew and MCKAY, Justin Lee					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
1.	<input checked="" type="checkbox"/>	This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.			
2.	<input type="checkbox"/>	This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.			
3.	<input checked="" type="checkbox"/>	This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(l).			
4.	<input checked="" type="checkbox"/>	A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.			
5.	<input checked="" type="checkbox"/>	A copy of the International Application as filed (35 U.S.C. 371(c)(2))			
	a.	<input type="checkbox"/>	is transmitted herewith (required only if not transmitted by the International Bureau).		
	b.	<input checked="" type="checkbox"/>	has been transmitted by the International Bureau		
	c.	<input type="checkbox"/>	is not required, as the application was filed in the United States Receiving Office (RO/US).		
6.	<input checked="" type="checkbox"/>	A translation of the International Application into English (35 U.S.C. 371(c)(2)).			
7.	<input checked="" type="checkbox"/>	Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).			
	a.	<input type="checkbox"/>	are transmitted herewith (required only if not transmitted by the International Bureau).		
	b.	<input type="checkbox"/>	have been transmitted by the International Bureau.		
	c.	<input type="checkbox"/>	have not been made; however, the time limit for making such amendments has NOT expired.		
	d.	<input checked="" type="checkbox"/>	have not been made and will not be made.		
8.	<input type="checkbox"/>	A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).			
9.	<input type="checkbox"/>	An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).			
10.	<input type="checkbox"/>	A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).			
Items 11. To 16. below concern documents or information included:					
11.	<input checked="" type="checkbox"/>	An Information Disclosure Statement under 37 CFR 1.97 and 1.98.			
12.	<input type="checkbox"/>	An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.23 and 3.31 is included.			
13.	<input checked="" type="checkbox"/>	A FIRST preliminary amendment.			
	<input type="checkbox"/>	A SECOND or SUBSEQUENT preliminary amendment.			
14.	<input type="checkbox"/>	A substitute specification.			
15.	<input type="checkbox"/>	A change of power of attorney and/or address letter.			
16.	<input type="checkbox"/>	Other items or information:			
<p>"EXPRESS MAIL" MAILING LABEL NUMBER: EL545147472 DATE OF DEPOSIT: <u>5-7-01</u></p> <p>I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO THE ASSISTANT COMMISSIONER FOR PATENTS, BOX PCT, WASHINGTON, D.C. 20231.</p> <p>TYPED OR PRINTED NAME: <u>JANICE MESSER</u> SIGNATURE: <u>Janice Messer</u></p>					


U.S. APPLICATION NO. (If known, see 37 CFR 1.51) 097831254		INTERNATIONAL APPLICATION NO. PCT/GB99/04142		ATTORNEY DOCKET NUMBER 3607WI-5	
17. <input checked="" type="checkbox"/> The following fees are submitted:				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):					
Search Report has been prepared by the EPO or JPO				\$860.00	
International preliminary examination fee paid to USPTO (37 CFR 1.482)				\$690.00	
No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))				\$710.00	
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid USPTO				\$1,000.00	
International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)				\$100.00	
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$ 1,000.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	29 - 20 =	9	x \$18.00	\$ 162.00	
Independent Claims	5 - 3 =	2	x \$80.00	\$ 160.00	
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ \$270.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$ 1,322.00	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed Note 37 CFR 1.9, 1.27, 1.28).				\$	
SUBTOTAL =				\$	
Processing fee of \$130.00 for furnishing the English translation later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) \$40.00 per property				\$	
TOTAL FEES ENCLOSED =				\$ 1,322.00	
				Amount to be: refunded	\$
				charged	\$

- ☒ A check in the amount of \$ 1,322.00 to cover the above fees is enclosed.
- ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 19-1970. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 cfr 1.494 or 1.495 has not been met, a petition to revive (37 cfr 1.137(a) or (b)) must be filed and granted to restore the application pending status.

AND ALL CORRESPONDENCE TO:

BERIDAN ROSS P.C.
60 Broadway, Suite 1200
Denver, Colorado 80202-5141
Telephone: (303) 863-9700
Facsimile: (303) 863-0223


SIGNATURE

Todd M. Petersen
Registration No. 45,580

PATENT APPLICATIONS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of:

CURTIS et al.

Int'l. Serial No.: PCT/GB99/04142

Int'l. Filing Date: 14 December 1999

Priority Date: 15 December 1998

For: "LOUDSPEAKER"

Atty. File No.: 3607WI-5

Box PCT

Assistant Commissioner for Patents
Washington, D.C. 20231PRELIMINARY AMENDMENT"EXPRESS MAIL" MAILING LABEL NUMBER: EL545147472US
DATE OF DEPOSIT: 5-7-01I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING
DEPOSITED WITH THE UNITED STATES POSTAL SERVICE
"EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE
UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND
IS ADDRESSED TO THE ASSISTANT COMMISSIONER FOR
PATENTS, BOX PCT, WASHINGTON, D.C. 20231.TYPED OR PRINTED NAME: JANICE MESSERSIGNATURE: 

Dear Sir:

Prior to the initial review of the above-identified patent application by the Examiner, please enter the following Preliminary Amendment. Fees for this Preliminary Amendment are calculated and included with the Transmittal Letter accompanying this Amendment. Please charge any underpayment or debit any overpayment to Deposit Account 19-1970.

IN THE CLAIMS:

Please amend Claims 1, 5, 6, 8-11, 13, 15-19, 21, 22, and 24-26 as follows:

1. (Amended) A portable loudspeaker for use with a personal player selected from the group consisting of a personal CD player, a personal mini-disc player and a personal stereo cassette player, the portable loudspeaker comprising a sound generating unit in a housing having an outer periphery in the shape of a storage device selected from the group consisting of a CD box, a tape cassette box, and a mini-disc box.

20250424 14:54:50

2. A portable loudspeaker according to claim 1, in which the housing comprises an open-top box enclosure and a lid.

3. A portable loudspeaker according to claim 2, in which the lid is movable from a first position covering the enclosure opening to a second position uncovering the enclosure opening.

4. A portable loudspeaker according to claim 3, in which the lid is attached to the open-top box enclosure with a hinge.

5. (Amended) A portable loudspeaker according to claim 2, in which the sound generating unit is attached to or mounted in the lid.

6. (Amended) A portable loudspeaker according to claim 2, further comprising a further sound generating element attached to or mounted in one side of the open-top box enclosure.

7. A portable loudspeaker according to claim 6, in which the said one side opposes the enclosure opening

8. (Amended) A portable loudspeaker according to claim 6, in which the said one side is movable relative to other sides of the open-top box enclosure.

9. (Amended) A portable loudspeaker according to claim 6, in which the said one side is a second lid, with the housing being in the shape of a storage device selected from the group consisting of[,] a double CD box, a double tape cassette box and a double mini-disc box.

10. (Amended) A portable loudspeaker according to claim 1, in which the sound generating unit comprises an acoustic radiator and a transducer mounted on or in the acoustic radiator to excite bending waves in the acoustic radiator for producing an acoustic output.

11. (Amended) A portable loudspeaker according to claim 1, in which the housing includes a radio receiver for receiving radio signal broadcasts and means for reproducing sound according to received radio signal broadcasts using the sound generating unit.

12. A portable loudspeaker according to claim 11, in which the radio receiver includes an aerial embedded in the housing.

13. (Amended) A portable loudspeaker for use with a personal player selected from the group consisting of a personal CD player, a personal mini-disc player and a personal stereo cassette player, the portable loudspeaker comprising a housing comprising an open-top box enclosure, a lid

for covering the enclosure opening, a sound generating unit mounted on or in the lid, and means coupled to the sound generating unit for receiving output signals from the personal player, wherein the lid is movable from a first position covering the enclosure opening to a second position uncovering the enclosure opening.

14. A portable loudspeaker according to claim 13, in which the lid is attached to the open-top box enclosure with a hinge.

15. (Amended) A portable loudspeaker according to claim 13, in which the outer periphery of the housing resembles a standard storage device selected from the group consisting of a CD box, a tape cassette box and a mini-disc box.

16. (Amended) A portable loudspeaker according to claim 13, in which the receiving means includes a socket for use in combination with a plug electrically connected to a personal player.

17. (Amended) A portable loudspeaker according to claim 13, further comprising a further sound-generating unit attached to or mounted in one side of the open-top box enclosure.

18. (Amended) A portable loudspeaker according to claim 13, in which the sound generating unit comprises an acoustic radiator.

19. A loudspeaker comprising an acoustic radiator and a transducer mounted on or in the acoustic radiator to excite bending waves in the acoustic radiator for producing an acoustic output, characterized in that the acoustic radiator comprises a first region and a second region surrounding the first region, the first region being stiffer than the second region and having the transducer mounted on or in it.

20. A loudspeaker according to claim 19, in which the first region has a first uniform stiffness.

21. (Amended) A loudspeaker according to claim 19, in which the second region has a second uniform stiffness.

22. (Amended) A loudspeaker according to claim 19, in which the stiffness variation is provided by the first region being thicker than the second region.

23. A loudspeaker according to claim 22, in which the first region is at least 25% thicker than the second region.

24. (Amended) A loudspeaker according to claim 19, in which the amplitude of displacements in the acoustic radiator are greater at frequencies below 300 Hz than they are above 300 Hz..

25. (Amended) A loudspeaker according to claim 19, in which the acoustic radiator provides an acoustic output at least in part through pistonic movement at frequencies below 300Hz.

26. (Amended) A portable loudspeaker for use with a personal player selected from the group consisting of a personal CD player, a personal min-disc player and a personal stereo cassette player, the portable loudspeaker comprising a sound generating unit in a housing having an outer periphery in the shape of a storage device selected from the group consisting of a CD box, a tape cassette box, and a mini-disc box, wherein the sound-generating unit comprises a loudspeaker comprising an acoustic radiator and a transducer mounted on or in the acoustic radiator to excite bending waves in the acoustic radiator for producing an acoustic output, characterized in that the acoustic radiator comprises a first region and a second region surrounding the first region, the first region being stiffer than the second region and having the transducer mounted on or in it.

27. A portable loudspeaker according to claim 26 in which the acoustic radiator is integrally moulded in the housing.

Please add Claims 28 and 29.

28. (New) A portable loudspeaker for use with a personal player selected from the group consisting of a personal CD player, a personal mini-disc player and a personal stereo cassette player, comprising a housing comprising an open-top enclosure, a lid for covering the enclosure opening, a sound generating unit mounted on or in the lid, and means coupled to the sound generating unit for receiving output signals from the personal player, wherein the lid is movable from the first position covering the enclosure opening to a second position uncovering the enclosure opening, and wherein the sound generating unit comprises a loudspeaker comprising an acoustic radiator and a transducer mounted on or in the acoustic radiator to excite bending waves in the acoustic radiator

Application No.: PCT/GB99/04142

for producing an acoustic output, the acoustic radiator comprising a first region and a second region surrounding the first region, the first region being stiffer than the second region and having the transducer mounted on or in it.

29. (New) A portable loudspeaker according to claim 28, in which the acoustic radiator is integrally moulded in the housing.


REMARKS/ARGUMENTS

The above amendments are being submitted in connection with the national stage filing of the present Application. The amendments eliminate the multiple dependent claims from the Application.

Attached hereto is a marked-up version of the changes made to the specification and claims by the current amendment. The attached page is captioned **"Version With Markings to Show Changes Made."**

Respectfully submitted,

SHERIDAN ROSS P.C.

By: 
Todd M. Petersen
Registration No. 45,580
1560 Broadway, Suite 1200
Denver, Colorado 80202-5141
(303) 863-9700

Date: 5/4/01

VERSION WITH MARKINGS TO SHOW CHANGES MADE

In the Claims:

Claims 1, 5, 6, 8-11, 13, 15-19, 21, 22, and 24-26 have been amended as follows and Claims 28 and 29 have been added.

30. (Amended) A portable loudspeaker for use with a personal player [as hereinbefore defined] selected from the group consisting of a personal CD player, a personal mini-disc player and a personal stereo cassette player, the portable loudspeaker comprising a sound generating unit in a housing having an outer periphery in the shape of a storage device selected from the group consisting of a CD box, a tape cassette box, and a mini-disc box.

5. (Amended) A portable loudspeaker according to claim 2, [3 or 4,] in which the sound generating unit is attached to or mounted in the lid.

6. (Amended) A portable loudspeaker according to [any one of] claim[s] 2 [to 5], further comprising a further sound generating element attached to or mounted in one side of the open-top box enclosure.

8. (Amended) A portable loudspeaker according to claim 6 [or 7], in which the said one side is movable relative to other sides of the open-top box enclosure.

9. (Amended) A portable loudspeaker according to claim 6, [7 or 8,] in which the said one side is a second lid, with the housing being in the shape of a storage device selected from the group consisting of[,] a double CD box, a double tape cassette box and a double mini-disc box.

10. (Amended) A portable loudspeaker according to [any one of the preceding] claim[s] 1, in which the sound generating unit comprises an acoustic radiator and a transducer mounted on or in the acoustic radiator to excite bending waves in the acoustic radiator for producing an acoustic output.

11. (Amended) A portable loudspeaker according to [any one of the preceding] claim[s] 1, in which the housing includes a radio receiver for receiving radio signal broadcasts and means for reproducing sound according to received radio signal broadcasts using the sound generating unit.

VERSION WITH MARKINGS TO SHOW CHANGES MADE

In the Claims:

Claims 1, 5, 6, 8-11, 13, 15-19, 21, 22, and 24-26 have been amended as follows and Claims 28 and 29 have been added.

30. (Amended) A portable loudspeaker for use with a personal player [as hereinbefore defined] selected from the group consisting of a personal CD player, a personal mini-disc player and a personal stereo cassette player, the portable loudspeaker comprising a sound generating unit in a housing having an outer periphery in the shape of a storage device selected from the group consisting of a CD box, a tape cassette box, and a mini-disc box.

5. (Amended) A portable loudspeaker according to claim 2, [3 or 4,] in which the sound generating unit is attached to or mounted in the lid.

6. (Amended) A portable loudspeaker according to [any one of] claim[s] 2 [to 5], further comprising a further sound generating element attached to or mounted in one side of the open-top box enclosure.

8. (Amended) A portable loudspeaker according to claim 6 [or 7], in which the said one side is movable relative to other sides of the open-top box enclosure.

9. (Amended) A portable loudspeaker according to claim 6, [7 or 8,] in which the said one side is a second lid, with the housing being in the shape of a storage device selected from the group consisting of[,] a double CD box, a double tape cassette box and a double mini-disc box.

10. (Amended) A portable loudspeaker according to [any one of the preceding] claim[s] 1, in which the sound generating unit comprises an acoustic radiator and a transducer mounted on or in the acoustic radiator to excite bending waves in the acoustic radiator for producing an acoustic output.

11. (Amended) A portable loudspeaker according to [any one of the preceding] claim[s] 1, in which the housing includes a radio receiver for receiving radio signal broadcasts and means for reproducing sound according to received radio signal broadcasts using the sound generating unit.

13. (Amended) A portable loudspeaker for use with a personal player [as hereinbefore defined] selected from the group consisting of a personal CD player, a personal mini-disc player and a personal stereo cassette player, the portable loudspeaker comprising a housing comprising an open-top box enclosure, a lid for covering the enclosure opening, a sound generating unit mounted on or in the lid, and means coupled to the sound generating unit for receiving output signals from [a] the personal player [as hereinbefore defined], wherein the lid is movable from a first position covering the enclosure opening to a second position uncovering the enclosure opening.

15. (Amended) A portable loudspeaker according to claim 13 [or 14], in which the outer periphery of the housing resembles a standard storage device selected from the group consisting of a CD box, a tape cassette box and a mini-disc box.

16. (Amended) A portable loudspeaker according to (any one of] claim[s] 13 [to 15], in which the receiving means includes a socket for use in combination with a plug electrically connected to a personal player.

17. (Amended) A portable loudspeaker according to [any one of] claim[s] 13 [to 16], further comprising a further sound-generating unit attached to or mounted in one side of the open-top box enclosure.

18. (Amended) A portable loudspeaker according to [any one of] claim[s] 13 [to 17], in which the sound generating unit comprises an acoustic radiator.

19. (Amended) A loudspeaker comprising an acoustic radiator and a transducer mounted on or in the acoustic radiator to excite bending waves in the acoustic radiator for producing an acoustic output, [characterised] characterized in that the acoustic radiator comprises a first region and a second region surrounding the first region, the first region being stiffer than the second region and having the transducer mounted on or in it.

21. (Amended) A loudspeaker according to claim 19 [or 20], in which the second region has a second uniform stiffness.

22. (Amended) A loudspeaker according to claim 19, [20 or 21,] in which the stiffness variation is provided by the first region being thicker than the second region.

24. (Amended) A loudspeaker according to [any one of] claim[s] 19 [to 23], in which the amplitude of displacements in the acoustic radiator are greater at frequencies below 300 Hz than they are above 300 Hz..

25. (Amended) A loudspeaker according to [any one of] claim[s] 19 [to 24], in which the acoustic radiator provides an acoustic output at least in part through piston movement at frequencies below 300Hz.

26. (Amended) A portable loudspeaker for use with a personal player selected from the group consisting of a personal CD player, a personal min-disc player and a personal stereo cassette player, the portable loudspeaker comprising a sound generating unit in a housing having an outer periphery in the shape of a storage device selected from the group consisting of a CD box, a tape cassette box, and a mini-disc box, wherein the sound-generating unit comprises a loudspeaker comprising an acoustic radiator and a transducer mounted on or in the acoustic radiator to excite bending waves in the acoustic radiator for producing an acoustic output, characterized in that the acoustic radiator comprises a first region and a second region surrounding the first region, the first region being stiffer than the second region and having the transducer mounted on or in it [according to any one of claims 1 to 12, or 13 to 18, in which the sound-generating unit comprises a loudspeaker according to any one of claims 19 to 25].

28. (New) A portable loudspeaker for use with a personal player selected from the group consisting of a personal CD player, a personal mini-disc player and a personal stereo cassette player, comprising a housing comprising an open-top enclosure, a lid for covering the enclosure opening, a sound generating unit mounted on or in the lid, and means coupled to the sound generating unit for receiving output signals from the personal player, wherein the lid is movable from the first position covering the enclosure opening to a second position uncovering the enclosure opening, and wherein the sound generating unit comprises a loudspeaker comprising an acoustic radiator and a transducer mounted on or in the acoustic radiator to excite bending waves in the acoustic radiator for producing an acoustic output, the acoustic radiator comprising a first region and a second region surrounding the first region, the first region being stiffer than the second region and having the transducer mounted on or in it.

Application No.: PCT/GB99/04142

29. (New) A portable loudspeaker according to claim 28, in which the acoustic radiator is integrally moulded in the housing.

TITLE: LOUDSPEAKERFIELD OF INVENTION

The present invention relates to a loudspeaker, particularly but not exclusively a portable loudspeaker for use with personal CD players (e.g. Sony DISCMAN CD players), personal mini disc players, and personal stereo cassette players (e.g. Sony WALKMAN tape cassette players). For the purposes of the present specification, such CD/mini disc/cassette players are defined as personal players.

10 BACKGROUND ART

Personal players are primarily intended to produce sound for one listener at a time. For this reason, personal players are supplied with headphones. Nevertheless, portable loudspeakers are available on the market and are intended for occasions when the personal players are used to reproduce sound for more than one person at a time. The portable loudspeakers must be compact and lightweight in order to meet user requirements.

The present applicant has appreciated that existing portable loudspeakers for personal players are perhaps not as compact as the user would like, so much so that storage is sometimes a problem. Therefore, an object of the present invention is to provide a portable loudspeaker which is more readily accepted by the user.

25 DISCLOSURE OF INVENTION

According to a first aspect of the present invention, there is provided a portable loudspeaker for use with a personal player as hereinbefore defined, comprising a

202200 15272800

housing having an outer periphery in the shape of a storage device selected from the group consisting of a CD box, a tape cassette box, and a mini disc box.

CDs, mini discs and audio tape cassettes are traditionally sold in standard-sized storage boxes and, as a result, there is a tendency for the users of personal players to accept readily the size of such storage boxes. Indeed, accessories such as carrying cases for personal players are sometimes designed to accommodate the standard-sized storage boxes in addition to the personal player itself. Accordingly, the present applicant has appreciated that a loudspeaker with a housing of substantially the same dimensions as one of the standard-sized storage boxes (be it single or double or otherwise) is likely to be more readily accepted by users of personal players because its size is in keeping with existing apparatus carried by users.

The housing may comprise an open-top box enclosure and a lid, with the lid being movable from a first position covering the enclosure opening to a second position upstanding from the enclosure. With the lid in the second position, projecting away from the enclosure opening, the interior of the enclosure becomes accessible, possibly for storing an item. The lid may be connected to the open-box enclosure with a hinge.

Preferably, the sound generating unit of the portable loudspeaker is mounted on or in the lid of the portable loudspeaker. In this way, the orientation of the sound-

generating element may be altered by moving the position of the lid relative to the open-box enclosure. This may be useful if the sound generating element produces a directional output, or to take advantage of beneficial reflections of sound waves, e.g. from a flat surface such as a table.

A further sound-generating unit may also be mounted in or on one side of the open-top box enclosure. The said one side may be movable relative to the other sides of the open-box enclosure. In this way, the lid and the said one side may be orientated to face in the same direction, perhaps for stereo sound reproduction, whilst the other sides of the open-box enclosure may project outwards to stabilise the portable loudspeaker. The outer periphery of the portable loudspeaker housing may be in the shape of a double CD, tape cassette or mini disc box, in which the said one side forms the second lid which faces the aforementioned lid when closed.

The dimensions of a CD box, particularly a double CD box, are well suited to producing a portable loudspeaker embodying the present invention.

The sound-generating unit of the portable loudspeaker may comprise a flat panel acoustic radiator and a transducer positioned to excite bending waves in the acoustic radiator and thereby radiate sound energy by flexural vibrations. The flat panel acoustic radiator may be a distributed mode acoustic radiator as disclosed in International patent application published under number

WO97/09842 in the name New Transducers Limited, the whole content of which is incorporated herein by reference. With the distributed mode acoustic radiator, the transducer would be mounted in or on the panel at a preferred location 5 to excite distributed modes of vibration in the panel.

The housing may house a battery for energising the sound generating element of the portable loudspeaker. The housing may also house a radio receiver for receiving radio signal broadcasts and subsequently reproducing sound 10 through the portable loudspeaker. The radio receiver may include an aerial which is embedded in the housing.

According to a second aspect of the present invention, there is provided a portable loudspeaker for use with a personal player as hereinbefore defined, comprising a 15 housing comprising an open-top box enclosure and a lid, a sound generator mounted on or in the lid, and means coupled to the sound generator for receiving output signals from a personal player, wherein the lid is movable from a first position covering the open-top box enclosure to a second 20 position upstanding from the open-top box enclosure.

The receiving means may include a socket for use in combination with a plug electrically connected to the personal player. In another embodiment, the receiving means may comprise: an infra-red receiver for use in combination 25 with an infra-red transmitter coupled to the personal player.

The lid may be connected to the open-top box enclosure with a hinge. A further sound generator element may be

mounted in or on one side of the open-top box enclosure, perhaps facing the enclosure opening. The said one side may be movable relative to the other sides of the enclosure, perhaps pivotally coupled thereto. The outer 5 periphery of the housing may resemble a standard storage device selected from the group consisting of a CD box, a tape cassette box, and a mini disc box. Other features of the second aspect of the invention are as set out hereinbefore with regard to the first aspect of the 10 invention.

According to a third aspect of the present invention, there is provided a loudspeaker comprising an acoustic radiator and a transducer mounted on or in the acoustic radiator to excite bending waves in the acoustic radiator 15 for producing an acoustic output, characterised in that the acoustic radiator comprises a first region and a second region surrounding the first region, the first region being stiffer than the second region and having the transducer mounted on or in it.

20 The first region may be regarded as a "stiff" island surrounded by the second region which may be regarded as a flexible diaphragm. The first region may have a first uniform stiffness, and the second region may have a second uniform stiffness - the first uniform stiffness being 25 greater than the second. The first and second uniform stiffnesses may be achieved by increasing the thickness of the acoustic radiator across the first region. The first region may be at least 25% thicker than the second region.

The transition between the different thicknesses of the first and second regions may be tapered to avoid a sharp step.

The amplitude of displacements in the acoustic radiator may be greater (perhaps at least five times greater) at frequencies below 300Hz than those at frequencies above 300Hz. Both the first and second regions may be sufficiently stiff to support the propagation of bending waves across the acoustic radiator, at least at high frequencies. However, by providing a peripheral region which is more readily able to flex than the island region, it is believed that the second region may support a degree of pistonic movement in the loudspeaker, thus enabling sound to be produced both pistonicly and vibrationally, especially at low frequencies. This may be significant at frequencies up to about 300Hz, where the pistonic contribution to the sound output may provide an important supplement to the vibrational component, especially in compact portable loudspeakers of the present invention.

The portable loudspeakers of either the first or second aspects of the present invention may include as the sound-generating unit a loudspeaker according to the third aspect of the present invention and any specific embodiments.

25 BRIEF DESCRIPTION OF DRAWINGS

Embodiments of the invention will now be described by way of example, with reference to the accompanying drawings, in which:

Figure 1 shows schematically a first embodiment of a portable loudspeaker embodying the present invention;

Figure 2 shows schematically a second embodiment of a portable loudspeaker embodying the present invention;

5 Figure 3 shows schematically a third embodiment of a portable loudspeaker embodying the present invention;

Figure 4 shows lid detail of the portable loudspeaker of Figure 3;

Figure 5 shows a partial cross-sectional view along 10 line XX of Figure 4; and

Figure 6a and 6b shows laservibrometry results illustrating acoustic behaviour at 250 Hz of the portable loudspeaker of Figure 3.

MODES OF CARRYING OUT THE INVENTION

15 Figure 1 shows a portable loudspeaker (10) resembling a double CD case, and comprising left- and right-hand lids (12,14) pivotally coupled about parallel axes AA and BB to side walling (16). The side walling (16) forms an open box like enclosure, with the left- and right-hand lids (12,14) 20 acting as the top and bottom surfaces to complete the enclosure. The portable loudspeaker (10) is illustrated in the "open" configuration to facilitate a description of the internal components; in the "closed" configuration (not shown), the portable loudspeaker (10) is the same shape and 25 size as a conventional double CD case, and thus has the outward appearance thereof. In the "open" configuration, the side walling (16) acts as a support stand for the portable loudspeaker (10). Rubber feet may be provided on

the bottom surface of side walling (16) to improve grip on smooth surfaces.

Each lid (12,14) comprises a sound generating unit in the form of a distributed mode acoustic radiator (20) 5 mounted in a frame (22) with a compliant foam surround (not shown) sandwiched therebetween to isolate the frame (22) from unwanted vibrations. The acoustic radiator (20) comprises a stiff, lightweight panel (24) and an exciter (26), positioned to excite distributed mode bending waves 10 in the panel (24). The acoustic radiator (20) works in accordance with the teachings of the disclosure of WO97/09842, the whole contents of which are incorporated herein by reference, and accordingly further explanation is unnecessary. The exciter (26) in the left-hand lid (12) is 15 offset relative to the one in the right-hand lid (14) to avoid fouling when the portable loudspeaker (10) is in the closed configuration.

The side walling (16) acts as a spacer between the left- and right-hand lids (12,14), providing storage space 20 for certain components. An amplifier (30) including a volume control (32) is mounted towards one corner of the side walling (16). The amplifier (30) is coupled to input connector (34) for receiving an output setting from a personal player such as a personal cassette player (36). 25 The input connector (34) could be replaced with a receiver for receiving infra-red output signals from a transmitter coupled to the personal player. The amplifier (30) sends electrical signals to the exciters (26) via wiring (not

shown) in order to generate sound. A battery (40) supplying power for the amplifier (30) is located in the corner of the side walling (16) opposite the amplifier (30); by locating the amplifier (30) and battery (40) in opposing 5 corners, space is left available to accommodate the exciters (26) when the loudspeaker (10) is in the closed configuration. A 12 volt d.c. input socket may be provided so that power may be introduced from a mains supply (via a transformer) as an alternative to the battery (40).

10 The amplifier (30) has incorporated with it a radio receiver (38) for receiving radio wave broadcasts to enable radio broadcasts to be heard using the portable loudspeaker (10). The radio receiver (38) has an aerial (39) embedded in side walling (16). An MP3 or mini-disc player may also 15 be incorporated in the assembly, perhaps alongside the amplifier.

Despite the presence of compliant foam isolating the acoustic radiator (20) from the frame (22), some vibrations may still be conveyed through the frame to the side walling 20 (16). Vibrations induced in the side walling (16) may be undesirable, and may be reduced by placing compliant foam absorbers (not shown) where the frames (22) may otherwise be in contact with the side walling (16).

Figure 2 shows a portable loudspeaker (50) resembling 25 a single CD case, and comprising a lid (52) pivotally coupled about axis A¹A¹ to open-top box enclosure (54). Open-top box enclosure (54) consists of sides (56) with an acoustic radiator (24, 26) coupled thereto. The portable

loudspeaker (50) is illustrated in the "open" configuration to show the internal components.

Where there are features in common with the embodiment of Figure 1, the same reference numerals have been used. A slimline battery arrangement (58) is illustrated, and the amplifier omitted for convenience. In any event, a miniature digital amplifier could be used in place of the somewhat larger analogue amplifier illustrated in Figure 1. A key difference between the Figure 1 and 2 embodiments is the fact that there is no independent side walling so that the lid (52) is hinged direct to the sides (56) defining with a base the open-top box enclosure (54). The acoustic radiator (24, 26) in the open-top box enclosure (56) is optional and if only one acoustic radiator is required in the portable loudspeaker (50), a standard panel (60) would be used as the base of the enclosure. A stereo signal could still be reproduced by using a pair of such loudspeakers.

Figure 3 shows a portable loudspeaker (70) resembling a double CD case. Where there are features in common with the embodiment of Figure 1, the same reference numerals have been used. Each lid (12,14) comprises a sound-generating unit comprising an acoustic radiator (72) which comprises a two-region panel (74) and an exciter (76), positioned to excite bending waves in the acoustic radiator for producing sound. Each acoustic radiator is integrally formed with the respective lid, being moulded from polycarbonate. Thus, there is no compliant foam isolating the acoustic radiator from the rest of the lid.

Figures 4 and 5 shows detail of lid (14) - including the position (78) for the corresponding transducer (equivalent to that of lid (12) when rotated through 180°). The position (78) may not be the optimised position for locating the transducer. The two-region panel (74) comprises a first region (80) of thickness t_1 , and a second region (82) of thickness t_2 . The second region (82) surrounds the first region (80) which may thus be regarded as an "island". The two-regional panel (74) is such that $t_1 > t_2$, and in the present case t_1 is 2.0mm and t_2 is 1.2mm. This means that the first region (80) is stiffer than the second region (84).

In use, a transducer (76) positioned on site (78) will produce bending waves across the panel (74). The first region (80) - being relatively stiff and lightweight - is particularly suited to propagating such bending waves. At frequencies below 300 Hz - say 250 Hz - the second region (82) allows for some pistonic movement in a direction perpendicular to the panel surface by virtue of the fact that it is less stiff than the first region (80).

Figures 6a and 6b are based on stills taken from laservibrometry experiments at an operating frequency of 250 Hz and give amplitude plots at two phases, 180° apart. On the left hand side of each Figure, results are shown for the two-region panel (74) of Figure 4 with the amplitude readings taken along a line passing through an exciter. For comparison, on the right hand side of each Figure, results are plotted for an equivalent uniform (distributed mode)

panel made from polycarbonate sheet 2mm thick. The amplitude displacements are greatest for the two-region panel (74) where the transducer/exciter (76) is located; the maximum amplitude is perhaps seven times or more 5 greater than that of conventional panel provided for comparison. The increased, pistonic-type displacements at frequencies below about 300Hz provide an enhanced bass response.

20220715218860

CLAIMS

1. A portable loudspeaker for use with a personal player as hereinbefore defined, comprising a sound generating unit in a housing having an outer periphery in the shape of a storage device selected from the group consisting of a CD box, a tape cassette box, and a mini disc box.
2. A portable loudspeaker according to claim 1, in which the housing comprises an open-top box enclosure and a lid.
3. A portable loudspeaker according to claim 2, in which the lid is movable from a first position covering the enclosure opening to a second position uncovering the enclosure opening.
4. A portable loudspeaker according to claim 3, in which the lid is attached to the open-top box enclosure with a hinge.
5. A portable loudspeaker according to claim 2, 3 or 4, in which the sound generating unit is attached to or mounted in the lid.
6. A portable loudspeaker according to any one of claims 2 to 5, further comprising a further sound generating element attached to or mounted in one side of the open-top box enclosure.
7. A portable loudspeaker according to claim 6, in which the said one side opposes the enclosure opening.
8. A portable loudspeaker according to claim 6 or 7, in which the said one side is movable relative to other sides of the open-top box enclosure.
9. A portable loudspeaker according to claim 6, 7 or 8,

in which the said one side is a second lid, with the housing being in the shape of a storage device selected from the group consisting of, a double CD box, a double tape cassette box and a double mini disc box.

- 5 10. A portable loudspeaker according to any one of the preceding claims, in which the sound generating unit comprises an acoustic radiator and a transducer mounted on or in the acoustic radiator to excite bending waves in the acoustic radiator for producing an acoustic output.
- 10 11. A portable loudspeaker according to any one of the preceding claims, in which the housing includes a radio receiver for receiving radio signal broadcasts and means for reproducing sound according to received radio signal broadcasts using the sound generating unit.
- 15 12. A portable loudspeaker according to claim 11, in which the radio receiver includes an aerial embedded in the housing.
13. A portable loudspeaker for use with a personal player as hereinbefore defined, comprising a housing comprising an
- 20 open-top box enclosure, a lid for covering the enclosure opening, a sound generating unit mounted on or in the lid, and means coupled to the sound generating unit for receiving output signals from a personal player as hereinbefore defined, wherein the lid is movable from a
- 25 first position covering the enclosure opening to a second position uncovering the enclosure opening.
14. A portable loudspeaker according to claim 13, in which the lid is attached to the open-top box enclosure with a

hinge.

15. A portable loudspeaker according to claim 13 or 14, in which the outer periphery of the housing resembles a standard storage device selected from the group consisting of a CD box, a tape cassette box and a mini disc box.

16. A portable loudspeaker according to any one of claims 13 to 15, in which the receiving means includes a socket for use in combination with a plug electrically connected to the personal player.

17. A portable loudspeaker according to any one of claims 13 to 16, further comprising a further sound-generating unit attached to or mounted in one side of the open-top box enclosure.

18. A portable loudspeaker according to any one of claims 13 to 17, in which the sound generating unit comprises an acoustic radiator.

19. A loudspeaker comprising an acoustic radiator and a transducer mounted on or in the acoustic radiator to excite bending waves in the acoustic radiator for producing an acoustic output, characterised in that the acoustic radiator comprises a first region and a second region surrounding the first region, the first region being stiffer than the second region and having the transducer mounted on or in it.

20. A loudspeaker according to claim 19, in which the first region has a first uniform stiffness.

21. A loudspeaker according to claim 19 or 20, in which the second region has a second uniform stiffness.

22. A loudspeaker according to claim 19,20 or 21, in which the stiffness variation is provided by the first region being thicker than the second region.

23. A loudspeaker according to claim 22, in which the first region is at least 25% thicker than the second region.

24. A loudspeaker according to any one of claims 19 to 23, in which the amplitude of displacements in the acoustic radiator are greater at frequencies below 300Hz than they are above 300Hz.

25. A loudspeaker according to any one of claims 19 to 24, in which the acoustic radiator provides an acoustic output at least in part through pistonic movement at frequencies below 300Hz.

26. A portable loudspeaker according to any one of claims 1 to 12, or 13 to 18, in which the sound-generating unit comprises a loudspeaker according to any one of claims 19 to 25.

27. A portable loudspeaker according to claim 26 in which the acoustic radiator is integrally moulded in the housing.



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ :

H04R 5/00, 7/06

A3

(11) International Publication Number:

WO 00/36875

(43) International Publication Date:

22 June 2000 (22.06.00)

(21) International Application Number: PCT/GB99/04142

(22) International Filing Date: 14 December 1999 (14.12.99)

(30) Priority Data:

9827537.3

15 December 1998 (15.12.98)

GB

(71) Applicant (for all designated States except US):

WHARFEDALE INTERNATIONAL LIMITED [GB/GB];
I.A.G. House, Ermine Business Park, Huntingdon, Cam-
bridgeshire PE18 6WA (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): CURTIS, Mervyn, Stan-
ley [GB/GB]; Woodside, 23 North Road, St. Ives, Cam-
bridgeshire PE17 4PR (GB). LONGBOTTOM, Simon, And-
rew [GB/GB]; 76 Dart Close, St. Ives, Cambridgeshire
PE17 6JB (GB). MCKAY, Justin, Lee [GB/GB]; 108 Mill
Road, Royston, Hertfordshire SG8 7AJ (GB).(74) Agent: EVENS, Paul, Jonathan; Maguire Boss, 5 Crown Street,
St. Ives, Cambridgeshire PE17 4EB (GB).(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG,
BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE,
ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,
KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU,
SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG,
US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE,
LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM,
AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT,
BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(88) Date of publication of the international search report:

14 September 2000 (14.09.00)

(54) Title: LOUDSPEAKER

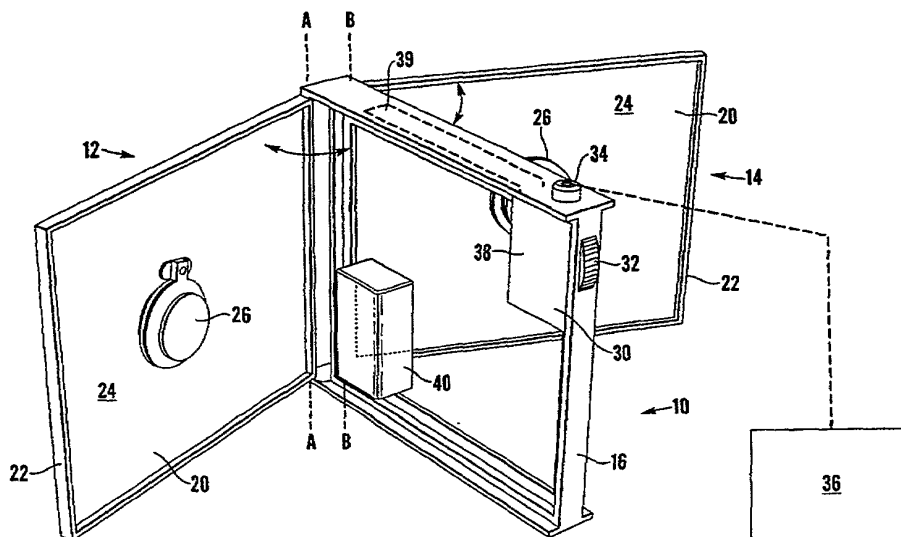

(57) Abstract

A portable loudspeaker (10) resembling a double CD case, comprises left- and right-hand lids (12, 14) pivotally coupled about parallel axes AA and BB to side walling (16). The side walling (16) forms an open box-like enclosure, with the left- and right-hand lids (12, 14) acting as the top and bottom surfaces to complete the enclosure when covering the opening at either end of the side walling (16). Each lid comprises a sound generating unit in the form of a distributed mode acoustic radiator (20). By adopting the shape of a double CD-case, the loudspeaker is more readily accepted as a portable loudspeaker by users of personal CD players. Similar considerations apply to portable loudspeakers shaped like single CD cases, audio-tape cassette cases and mini-disc cases.

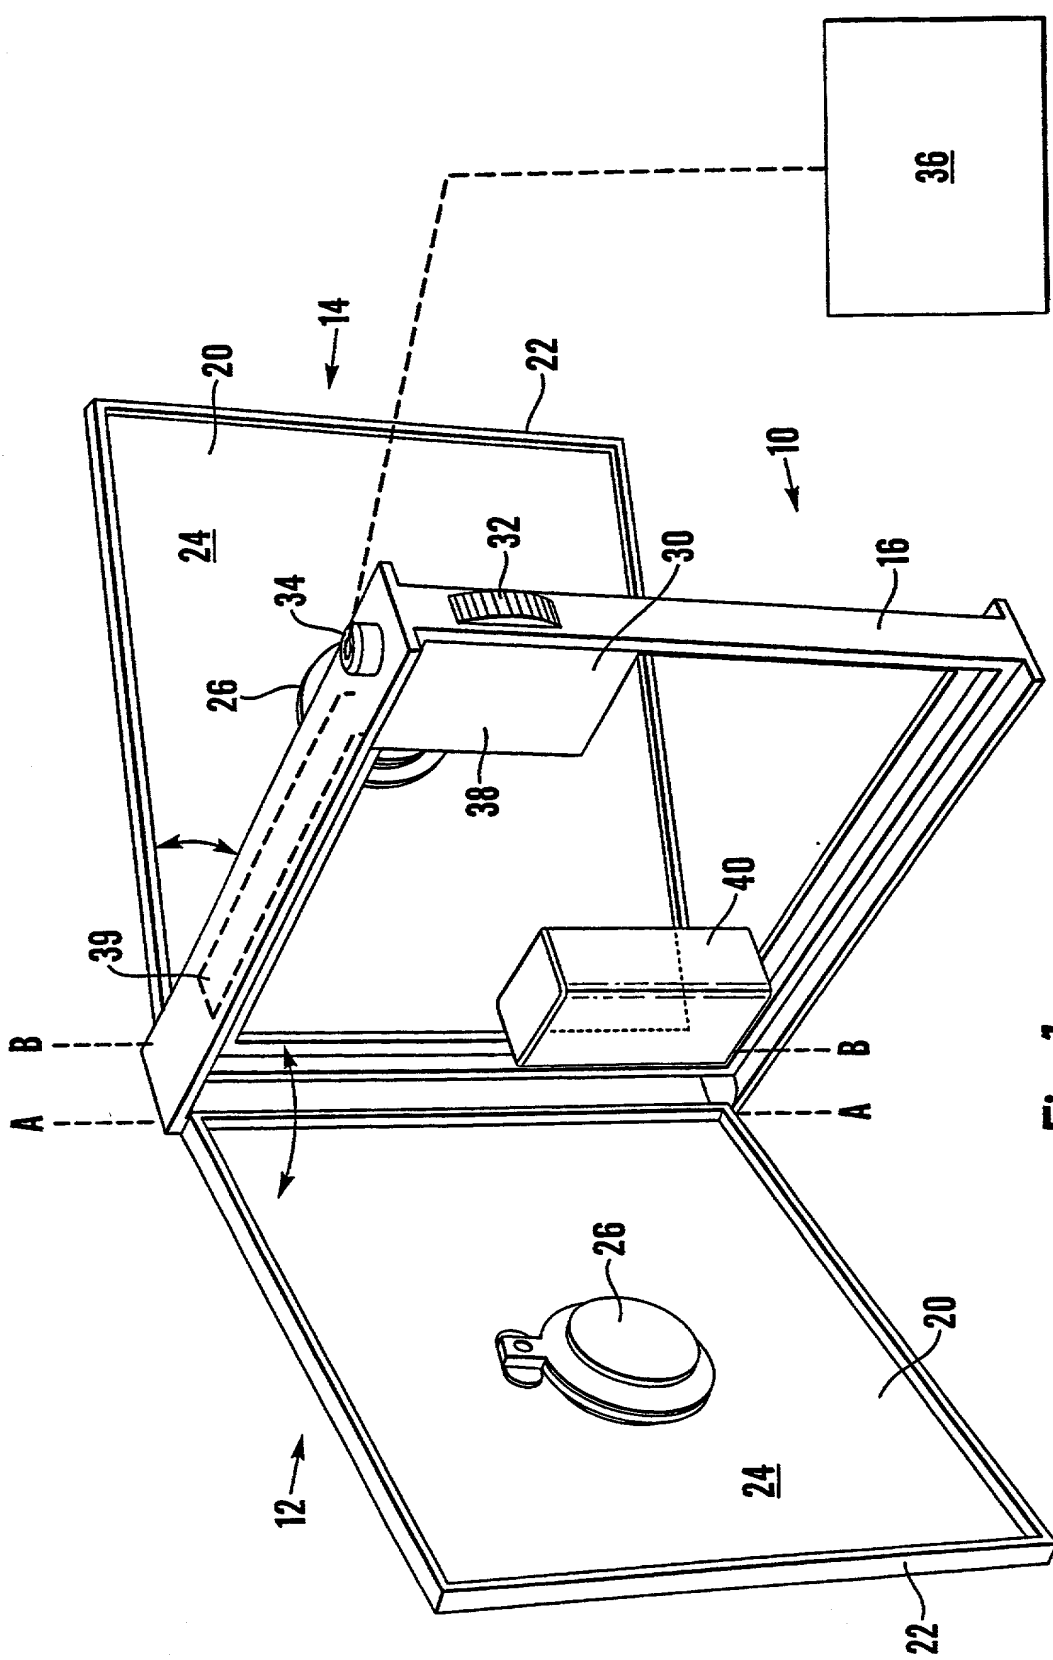


Fig. 1

20220415213600

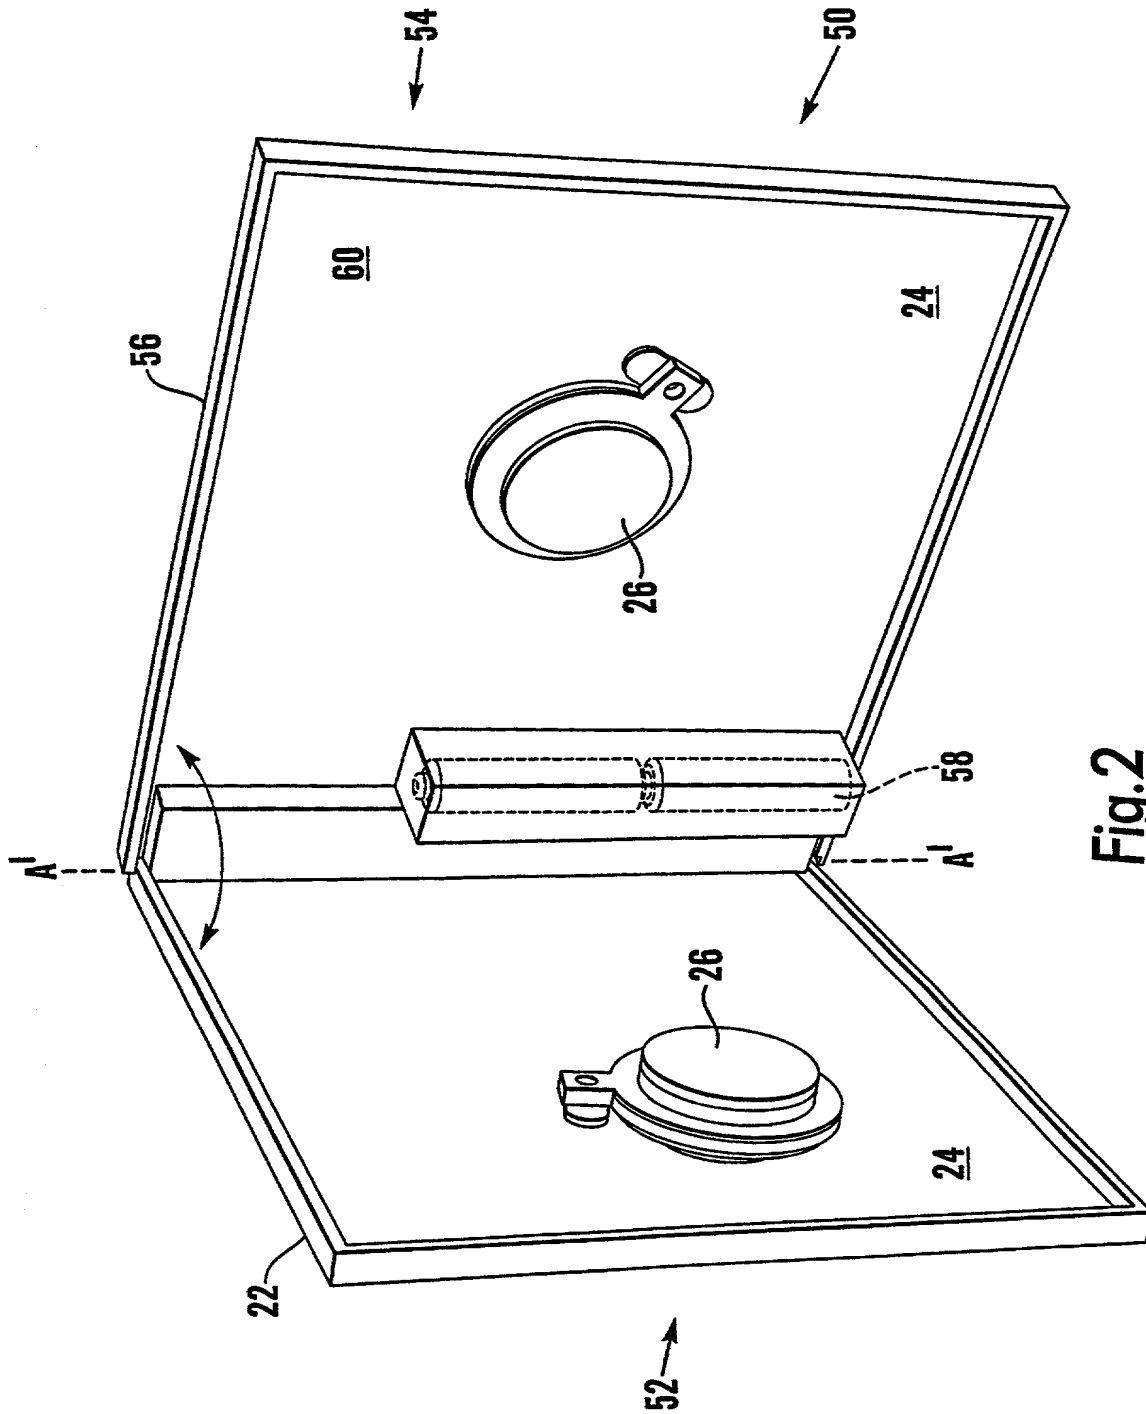
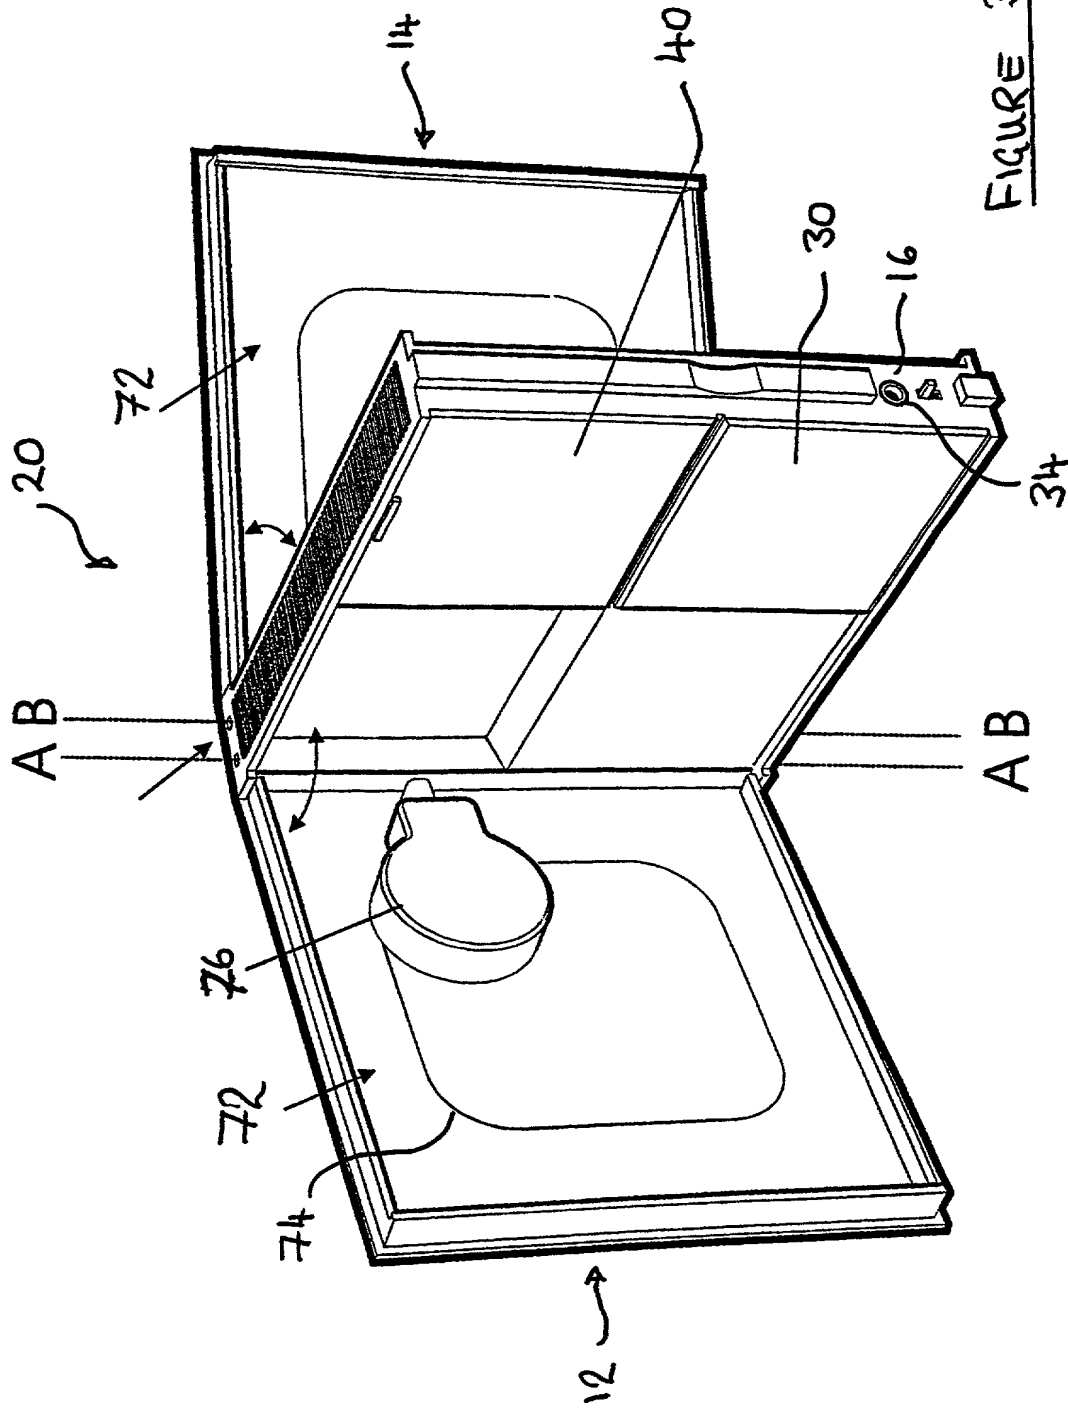


Fig. 2



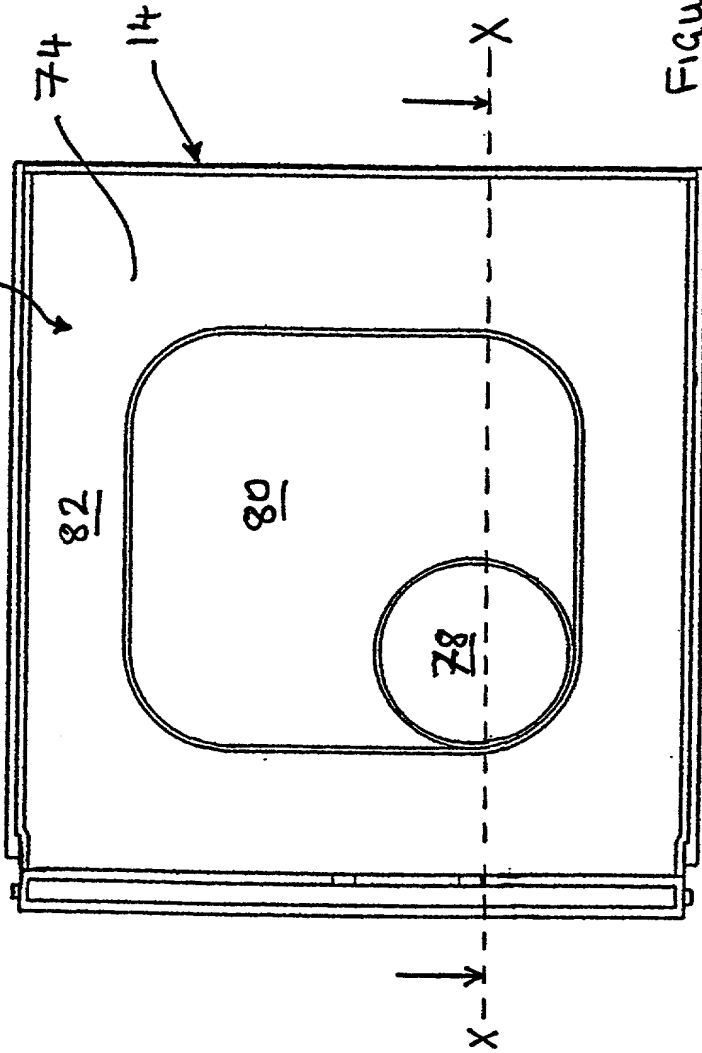


FIGURE 4

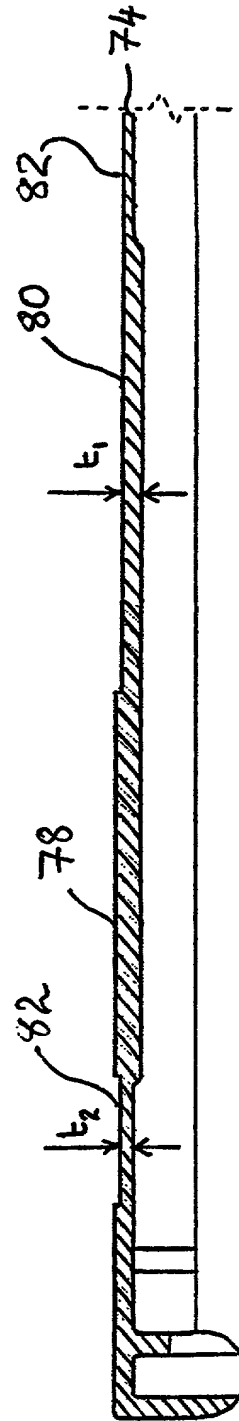


FIGURE 5

09/831254

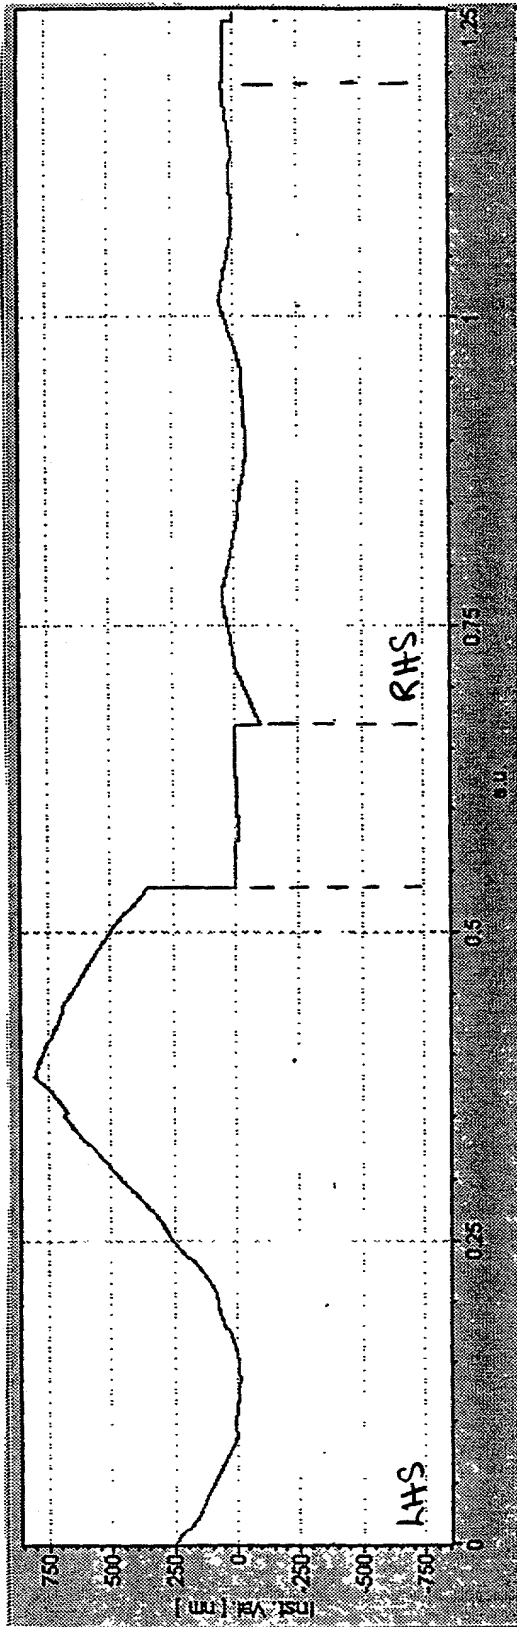


FIGURE 6a
RHS = CONTROL (UNIFORM PANEL)

LHS = FIGURE 4 GEOMETRY

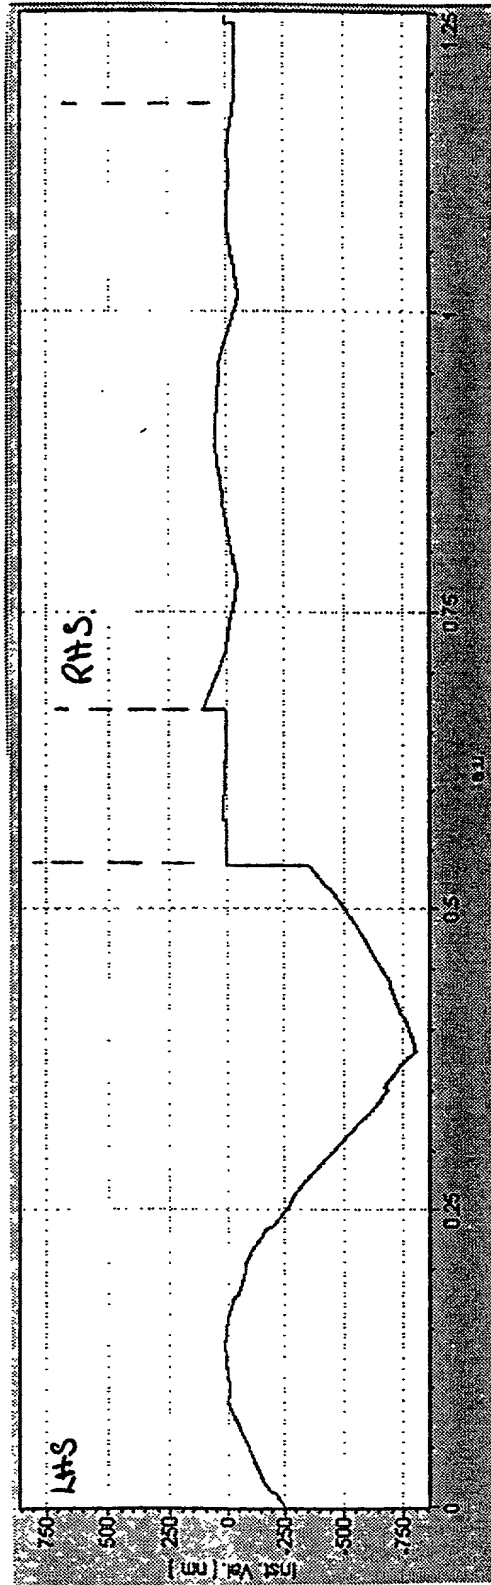


FIGURE 6b

PTO/SB/01 (8-95)

Approved for use through 10/31/98 OMB 0651-0032

Type a plus sign (+) inside this box → ☐

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

DO/PTO Rev. 6/95	U.S. Department of Commerce Patent and Trademark Office	Attorney Docket Number	3607WI-5
DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION		First Named Inventor	Mervyn Stanley Curtis
		COMPLETE IF KNOWN	
		Application Number	09/831,254
		Filing Date	May 7, 2001
		Group Art Unit	
		Examiner Name	
<input type="checkbox"/> Declaration Submitted with Initial Filing OR <input checked="" type="checkbox"/> Declaration Submitted after Initial Filing			

As below named inventor, I hereby declare that::

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed for which a patent is sought on the invention entitled:

"LOUDSPEAKER"

(Title of the invention)

the specification of which

☐ Is attached hereto
OR

☒ was filed on as United States Application Number or PCT International

 Application Number and was amended on (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 (a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any Pct international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				Yes	No
9827537.3	United Kingdom	December 15, 1998	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below

Application Number(s)	Filing Date (MM/DD/YYYY)		
		<input type="checkbox"/>	Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

Burden Hour Statement: This form is estimated to take .4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information officer, Patent and Trademark Office, Washington, DC 20231.

DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents Washington, DC 20231

Type a plus sign (+) inside this box → ☐

DECLARATION

Page 2

I hereby claim the benefit under Title 35, United States Code § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States of PCT international application in the manner provided by the first paragraph of Title 35, United States Code § 112.1 acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
	PCT/GB99/04142	December 14, 1999	

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority sheet attached hereto.

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☒ Firm Name OR **SHERIDAN ROSS P.C.** Customer Number or label ☐
☐ List attorney(s) and/or agent(s) name and registration number below:

Name	Registration Number	Name	Registration Number
ZINGER, DAVID F.	29,127	HANSEN, LEWIS D.	35,536
GROSETH, CRAIG C.	31,713	KOVARIK, JOSEPH E.	33,005
BLAKELY, TODD P.	31,328	SWARTZ, DOUGLAS W.	37,739
CONNELL, GARY J.	32,020	KUGLER, BRUCE A.	38,942
CROOK, WANNELL M.	31,071	BRUNELLI, ROBERT R.	39,617
STAVISH, SABRINA CROWLEY	33,374	HANSRA, TEJPAL S.	38,172

☒ Additional attorney(s) and/or agent(s) named on a supplemental sheet attached hereto

Please direct all correspondence to: ☐ Customer Number or label OR ☐ Fill in correspondence address below



Name **TODD M. PETERSEN**
Address **1560 BROADWAY, SUITE 1200**
Address
City **DENVER** State **COLORADO** Zip **80202-5141**
Country **UNITED STATES OF AMERICA** Telephone **(303) 863-9700** Fax **(303) 863-0223**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this unsigned inventor

Given Name **Mervyn** Middle Initial **S.** Family Name **Curtis** Suffix e.g. Jr.
Inventor's Signature **[Signature]** Date **22/3/2002**
Residence City **St. Ives** State **Cambridgeshire** Country **GB** Citizenship **GB**
Post Office Address **Woodside, 23 North Road**
Post Office Address
City **St. Ives** State **Cambridgeshire** Zip **PE17 4PR** Country **GB** Applicant Authority
☒ Additional inventors are being named on supplemental sheet(s) attached hereto.

Type a plus sign (+) inside this box → ☐


DECLARATION										ADDITIONAL INVENTOR(S) Supplemental Sheet			
Name of Additional Joint Inventor, if any:						<input type="checkbox"/> A petition has been filed for this unsigned inventor							
Given Name	Simon				Middle Initial	A.		Family Name	Longbottom			Suffix e.g. Jr.	
Inventor's Signature							Date	21/3/02					
Residence City	St. Ives				State	Cambridgeshire		Country	GB		Citizenship	GB	
Post Office Address	76 Dart Close												
Post Office Address													
City	St. Ives		State	Cambridgeshire		Zip	PE17 6JB		Country	GB		Applicant Authority	
Name of Additional Joint Inventor, if any:						<input type="checkbox"/> A petition has been filed for this unsigned inventor							
Given Name	Justin				Middle Initial	L.		Family Name	McKay			Suffix e.g. Jr.	
Inventor's Signature							Date	19/3/12					
Residence City	Royston				State	Hertfordshire		Country	GB		Citizenship	GB	
Post Office Address	108 Mill Road												
Post Office Address													
City	Royston		State	Hertfordshire		Zip	SG8 7AJ		Country	GB		Applicant Authority	
Name of Additional Joint Inventor, if any:						<input type="checkbox"/> A petition has been filed for this unsigned inventor							
Given Name					Middle Initial			Family Name				Suffix e.g. Jr.	
Inventor's Signature							Date						
Residence City					State			Country			Citizenship		
Post Office Address													
Post Office Address													
City			State			Zip			Country			Applicant Authority	
Name of Additional Joint Inventor, if any:						<input type="checkbox"/> A petition has been filed for this unsigned inventor							
Given Name					Middle Initial			Family Name				Suffix e.g. Jr.	
Inventor's Signature							Date						
Residence City					State			Country			Citizenship		
Post Office Address													
Post Office Address													
City			State			Zip			Country			Applicant Authority	

[] Further applicants and/or (further) inventors are indicated on another continuation sheet

Form PCT/RO/101 (continuation sheet)(July 1998)(form duplicated by Sheridan Ross P.C.-jmm)

See Notes to the request form

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

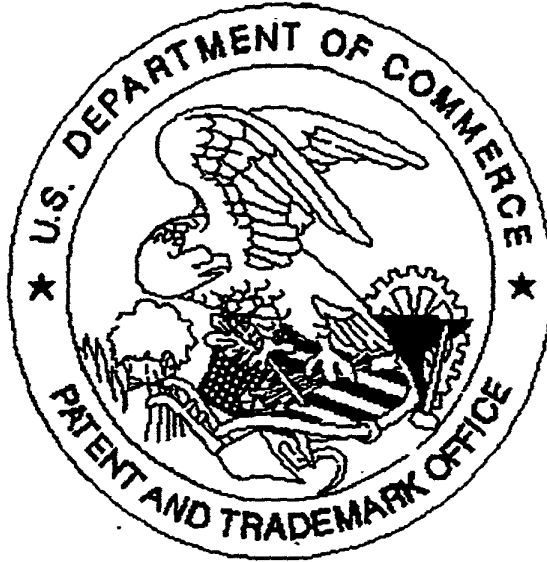

Application deficiencies found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☒ Scanned copy is best available. FIG. 5-

is/are too dark;